## **EUROPEAN PATENT OFFICE**

## **Patent Abstracts of Japan**

PUBLICATION NUMBER : 2000176192 PUBLICATION DATE : 27-06-00

APPLICATION DATE : 16-12-98 APPLICATION NUMBER : 10357474


APPLICANT: NEOFIELD:KK:

INVENTOR: ITO TATSUYA;

INT.CL. : D06F 21/04 D06F 35/00 D06F 39/02

D06F 43/02

TITLE : CLEANING DEVICE AND METHOD

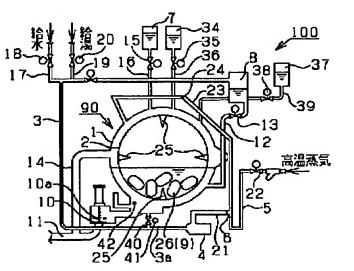

ABSTRACT :

PROBLEM TO BE SOLVED: To facilitate the temperature control of water for washing by installing a mixer to mix water with high-temperature steam to generate warm water at a location separated from the outer drum of a washing machine with a rotating inner drum and the fixed-type outer drum and connecting the mixer to the inside of the washing machine by a circulating path.

SOLUTION: A cleaning device is provided with a washing machine 90 formed by housing a rotation-free inner drum 2 in an outer drum 1 and a mixer 6 to mix water from a water supply pipe 3 provided with a pump 4 with hot- temperature steam from a high-temperature steam supply pipe 5 to generate warm water. The mixer 6 is disposed at a location separated from the outer drum 1 to prevent the heat of the high-temperature steam from being directly transferred to the outer drum 1. Then generated warm water is supplied for the inside of the outer drum 1 via a pipe 23 provided with a thermistor 24. In addition, a shrink-proofing liquid concentrate supplying device 7 and a detergent supplying device 8 housing a detergent formed of an anionic surface active agent are installed and are each connected to the outer drum 1 via pipes 16 and 12 provided with 15 and 13, respectively. Drainage in the outer drum 1 is discharged from a drainpipe 14.

COPYRIGHT: (C)2000, JPO